

# Technical information

## Boxer 42XL



### Characteristics

- Supplied with one sealing bar as standard (front)
- Double seal as standard (two sealing wires).  
Optional at no extra cost: Cut-off/Wide seal
- Easy-to-remove sealing bar for easy cleaning
- Pump maintenance and cleaning program
- Digital time control with ten-program memory as standard
- Soft Air as standard to protect the product and vacuum bag
- Stainless steel casing and transparent lid
- Supplied with three insert plates for a faster cycle and good product positioning

### Options

- Second sealing bar (Boxer 42XL-2)
- 1-2 Cut-off seal
- Sensor control
- Advanced Control System (ACS)
- Liquid control
- Gas flush
- Bi-Active seal


### Accessories

- Thermal label printer (only in combination with ACS)
- Inclined insert plate (for liquids and powders)
- External adapter
- Maintenance set for standard maintenance
- Trolley with shelves



| Specs                                               | Boxer 42XL                                                                                  |
|-----------------------------------------------------|---------------------------------------------------------------------------------------------|
| Chamber LxWxH (mm)                                  | 460x420x180                                                                                 |
| Machine LxWxH (mm)                                  |                                                                                             |
| - Boxer 42 XL                                       | 615x490x440                                                                                 |
| - Boxer 42 XL-2                                     | 615x490x470                                                                                 |
| Voltage                                             | 230V-1-50Hz 100V-1-50/60Hz<br>110/115V-1-60Hz 220V-1-60Hz                                   |
| Pump capacity 50 Hz/60 Hz (m3)                      | 21 / 25                                                                                     |
| Machine cycle 50 Hz/60 Hz (sec.)                    | 13-35 / 11 - 31                                                                             |
| Power (kW)                                          | 0,8 - 1,0                                                                                   |
| Weight (kg)                                         | 72                                                                                          |
| Net seal length (mm)                                | 410                                                                                         |
| Sealing bar configuration<br>- standard<br>- option | <div>                     standard<br/> </div> <div>                     option<br/> </div> |

### Dimensions mm

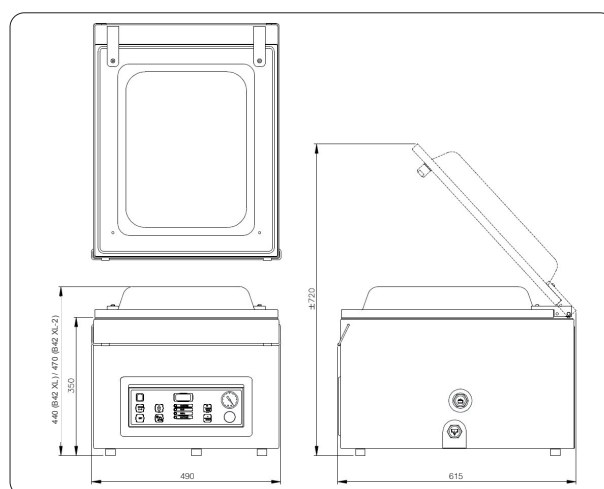

**Henkelman BV**  
Titaniumlaan 10  
5221 CK 's-Hertogenbosch  
The Netherlands  
+31 73 621 36 71

**Sales support**  
info@henkelman.com

**Service/technische support**  
service@henkelman.com